


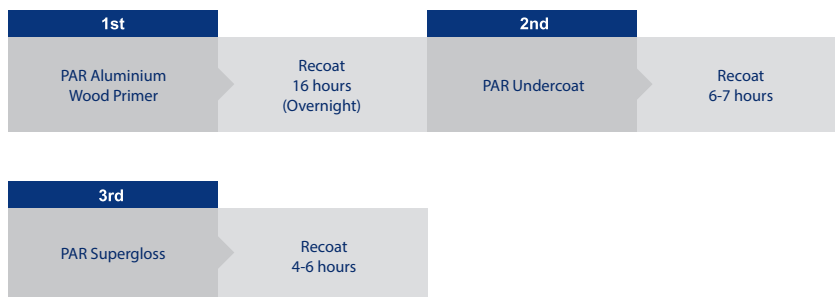


<b>PRODUCT NAME :</b>	PAR ALUMINIUM WOOD PRIMER
<b>DESCRIPTION :</b>	PAR Aluminium Wood Primer by Kansai is a solvent based primer formulated of priming bare wood. Its special aluminium pigment which forms an aluminium flake barrier will prevent the leeching of wood gum and resinous materials from contaminating the wood coatings. Approved by SIRIM to Malaysian Standard MS162:1987.
<b>DESIGNED USE :</b>	For use as a wood primer with outstanding sealing properties, PAR Aluminium Wood Primer is ideal for all types of interior and exterior soft and hard woods, particularly those which are highly resinous.
<b>BINDER TYPE :</b>	Premium grade alkyd binder pigments with high grade non-leafing aluminium flakes and other high grade pigments.
<b>PERFORMANCE :</b>	<ul style="list-style-type: none"> <li>▪ Good adhesion to most wooden surfaces.</li> <li>▪ Excellent resistance to moisture.</li> <li>▪ Excellent filling properties.</li> <li>▪ Good build and opacity.</li> <li>▪ No added lead or mercury.</li> </ul>
<b>PHYSICAL PROPERTIES :</b>	
Coverage*	12 – 15 m <sup>2</sup> /Lt @ 25 microns
Volume Solids	42%
Dry Film Thickness	25 microns / coat
Wet Film Thickness	60 microns / coat
Flash Point	32°C
<b>FINISHING :</b>	
Colours	Aluminium.
Finish	Low sheen.
Pack Size	1 & 5 litres.
<b>APPLICATION :</b>	
Drying Times	Surface dry : 2-3 hours ; Recoat : 16 hours (Overnight for best result).
Dilution	Mineral turpentine.
Cleaning Up	Mineral turpentine.
<b>DILUTION RATIO :</b>	
Brush	Only brush application is recommended to ensure good penetration into wood grains and crevices to provide moisture resistance. This paint is ready for use after thorough stirring.
<b>SURFACE PREPARATION</b>	<p>New, unpainted surfaces : Wood</p> <p>Surfaces must be clean, dry and free from all defective or poorly adhering materials. Patch all holes and crevices with appropriate wood fillers. Loose grains must be sanded off using suitable abrasive paper and dust off. Work the paint into the wood grain and crevices to ensure best performance.</p> <div style="display: flex; justify-content: space-around; align-items: flex-end;"> <div style="text-align: center;">  <p>Seal a coat with primer</p> </div> <div style="text-align: center;">  <p>Use abrasive paper</p> </div> <div style="text-align: center;">  <p>Dust off</p> </div> </div>

## RECOMMENDED PAINT SYSTEM

New, unpainted surfaces : Wood



### Limitations

- Application by roller or spray is not recommended.
- 2 coats of PAR Aluminium Wood Primer are recommended for highly resinous wood. Allow 48 hours between coats for best result.

## SAFETY & HEALTH INFORMATION

- This product contains white spirit. Ensure adequate lighting and ventilation during application and drying. Do not use in confined spaces. Keep windows and doors open at all times.
- This product does not contain added lead or mercury.
- When applying paints, it is advisable to wear eye protection.
- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- Use soap and water to remove splashes from skin.
- Storage : Keep container closed and store in clean and dry conditions.
- Do not empty into drains or water courses.
- This product is not flammable. Keep out of reach of children.
- Chemical Safety Data Sheet (CSDS) is available upon request.



Keep seal tight



Secure upright



Wear proper  
protection



Practice proper  
disposal

### For further information on Product Data, please contact:

Decorative Sales Department  
Kansai Paint Philippines, Inc.  
Unit 8A South Luzon International Business Park, Brgy. Batino, Calamba City, Laguna 4027 Philippines.  
Tel (Manila Line) : +63(2) 8519 4276 Tel (Laguna Line) : +63(49) 530 9876

\* Practical coverage will vary according to the roughness and porosity of surface to be painted, the application method and condition, dry film thickness and the skill of applicator.

The information in this technical data sheet is given to the best of our knowledge based on laboratory testing and practical experience and is provided as a general advice only. No guarantee of results is implied since the conditions of use are beyond our control. It is the responsibility of the users to ensure the suitability and proper usage of the product. We reserve the right to change the data without prior notice.